

MODEL *EDC BULLNOSE* STANDARD & EXTENDED BULLNOSE

SECURITY TURNSTILES

alvaradomfg.com

Alvarado's EDC Bullnose turnstile provides the performance of Alvarado's superior EDC turnstile in an extremely attractive "bullnose" style cabinet.

The elegant profile of the EDC Bullnose makes it suitable for any upscale installation. No external bolts are visible on the turnstile, and the attractive bullet style head and arms provide a comfortable patron passage width.

Internal components include stainless steel investment grade castings and hardened stainless steel locking components. Hydraulically dampened arm rotation with automatic arm self-centering offers patrons a smooth, effortless rotation experience. EDC Bullnose electronics are state-of-the-art.

A rugged multi-function controller, electronic rotation detection, bi-directional interface and time-out functionality are all standard on electrically controlled models.

The EDC Bullnose integrates easily with any identification and access system. A large terminal strip interface and helpful field diagnostics simplify installation and troubleshooting.

Alvarado EDC Bullnose and Extended Bullnose models are available in satin stainless steel and color powder coat finishes. Standard card reader attachment and custom internal integration of readers is available.

- ***Appealing Design is Suitable for Upscale Installations***
- ***Secures Entry/Exit Points***
- ***Hydraulically Dampened Rotation***
- ***Multi-Function Controller***
- ***Easy Installation and Systems Integration***



ALVARADO



PRODUCT NAME

EDC Bullnose, EDC Extended Bullnose - The extended bullnose offers the same functionality as the standard bullnose, but with an extended cabinet and longer arms.

APPLICATIONS

Manual EDC Bullnose - Provides directional control in a facility requiring an orderly flow and/or count of patrons.

Electric EDCX Bullnose - Provides controlled access to an area requiring access or admission control.

PRODUCT FEATURES - Mechanical

Styling

- Sleek rounded ends
- No exposed bolts or fasteners
- Concealed anchoring system

Materials and Operation

- Locking hinged lid
- Stainless steel investment cast components
- Hydraulically dampened arm operation self-centers arms and prevents over travel
- Wide patron passage width
- Key overrides allow an attendant to lock/unlock either direction of passage

Finishes

- Stainless steel polished to a #4 satin finish
- Baked on color powder coat

Upgrading to Electric Lock Control

- All EDC manual units accept electrical components for easy field upgrade.

PRODUCT FEATURES - Electrical

Electric

- 110VAC input stepped down to low voltage 12VDC
- Junction box with dual power receptacle and on/off power switch provided
- Electric turnstiles tested and approved by Los Angeles City Testing Laboratories

Controller and Access Control Operation

- Electronic rotation detection - no mechanical microswitches required
- Bi-directional interface - an isolated dry contact signal activates the turnstile - no added interface relay required
- Turnstile automatically relocks in 20 seconds if no passage after activation
- Controller provides dry contact rotation signal output to access control provider and/or remote counting system
- Field activation test buttons allow testing of turnstile functionality separately from access system
- "Attendant Override" input accepts dry contact signal to allow attendant to bypass the access control system and unlock the turnstile.

PRODUCT SELECTION

MANUAL (EDC Bullnose)

EDC-BN-3 - Free rotating in both directions, key lock for both directions.

EDC-EBN-3 - Free rotating in both directions, key lock for both directions. Extended cabinet and arms.

ELECTRIC (EDCX Bullnose)

EDCX-BN-6X - Electrically controlled in both directions.

EDCX-EBN-6X - Electrically controlled in both directions. Extended cabinet and arms.

EDC Bullnose OPTIONS

Counters - Resettable or non-resettable lithium battery powered counter recessed into the turnstile. Computerized counting also available.

Status Lights - Green/red to indicate locked/unlocked status or yellow/green/red to indicate ready status and accept/reject status received from access system.

Fail-Safe - Turnstile provides free rotation upon loss of power in the electrically controlled directions.

Adjustable Timed Delay Auto Re-Lock - Allows the duration of time allowed before unit automatically re-locks to be adjusted or disabled in each electrically controlled direction.

Card/Swipe Reader Mounting - Units can be fitted with mountings for most card reader systems.

Remote Locking - Bypasses the access control system and remotely "closes" the unit in the electrically controlled direction(s).


220 - 240 Volt Transformer - Replaces standard transformer.

Serial Interface - Allows turnstile to communicate with a PC or controller via RS-232 serial communication.

Custom Options - Custom materials and designs are available to meet specific requirements.

WARRANTY

Alvarado's one-year written warranty applies to all products.

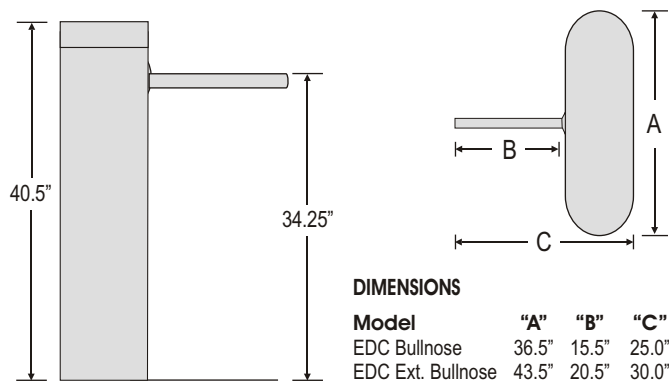

PDS1025R3-3