

PKS-02/FP Stanchion Installation Instructions



Notice: Installers and/or Store Personnel must provide this document to the manager or person responsible for the maintenance and use of the product. Read the Installation Instructions completely before installation of the product. If there are any questions, call Alvarado at (909) 591-8431 or toll free at (800) 423-4143, Monday through Friday, 6:00 AM to 4:30 PM PST.

***Materials enclosed and Installation instructions same for both PKS-02-01(Chrome finish) and PKS-02-02(Brass finish)**

Materials Enclosed:

- | | | |
|------------------------|-------------------------|-------------------------|
| 1. FP Post (Qty: 2) | 3. Base Weight (Qty: 2) | 5. Washer (Qty: 2) |
| 2. Base Cover (Qty: 2) | 4. Hex Bolt (Qty: 2) | 6. Rubber Ring (Qty: 2) |

Tool(s) Required: Ratchet and 3/4" Socket

Follow the Instructions to assemble a FP stanchion:

1. Place the Post upside-down on a padded surface to prevent the top of the Post from being scratched.
2. Assemble the unit by fully inserting the Hex Bolt through the Steel Washer, Base Weight, Base Cover, Rubber Ring and Post as shown below.
3. While properly aligned, smoothly hand-tighten the Hex Bolt.
4. Use a 3/4" Socket to securely tighten the Hex Bolt to the Post while holding onto the Post. **Do NOT rotate the Post to tighten the bolt**, as this will break the Rubber Ring and scratch the Base Cover.

Maintenance:

Follow the instructions for the corresponding finish

Chrome:


Use a general all-purpose cleaner with a soft cloth.

Brass:

Use a general all-purpose cleaner with a soft cloth.

*Replace any sharp, bent, or broken pieces **IMMEDIATELY**. Tighten any loose pieces.*

Refer to diagram below for pictorial illustration of assembly

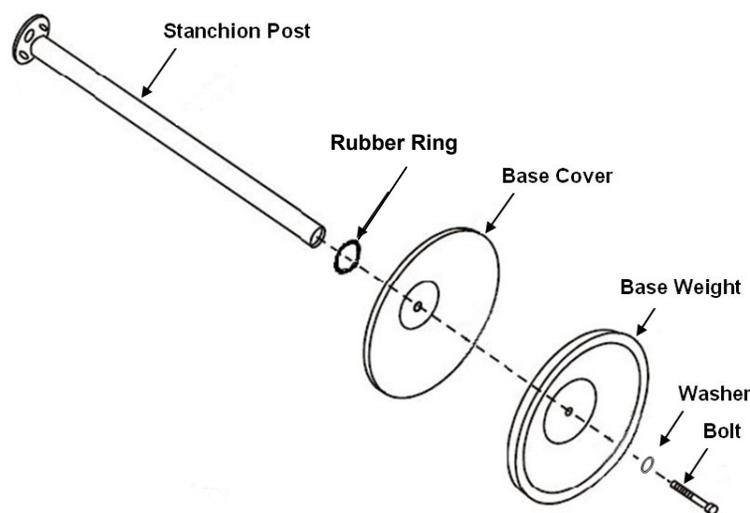

Warranty: Alvarado Manufacturing Company warrants the equipment being sold against defects in material and workmanship, for the period of one (1) year from the date of purchase, providing recommended installation and maintenance procedures are followed. This warranty is void if damage was due to improper installation, maintenance, or use. The manufacturer will not be responsible for any shipping or labor charges incurred in the removal or replacement of defective parts.