


C Post

Protection Post

The C post is a fixed anchored post that provides heavy-duty impact protection for store fixtures and equipment. The post is often used in retail environments where forklifts, pallet jacks and hand trucks are commonly used.

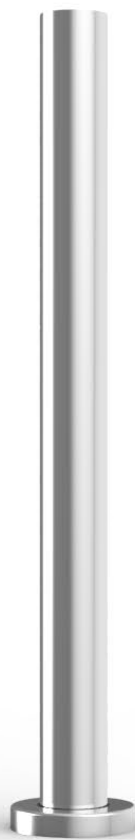


TYPICAL INSTALLATION SITES

- Supermarkets/Retail Stores
- Food Service Areas
- Warehouses

FUNCTION

Alvarado's C post is a fixed anchored post that provides heavy-duty impact protection for store fixtures and equipment. The post comes with a matching base cover which conceals installation bolts and provides a clean, finished look.

The standard fixed option anchors to the floor with four 0.375" bolts, expansion anchors and washers (shown right).

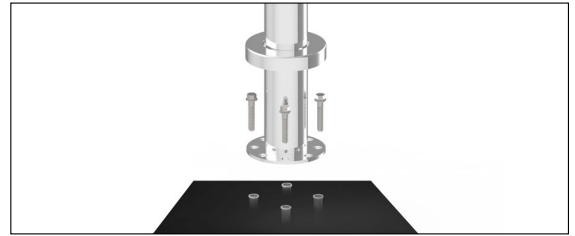

AVAILABLE HEIGHTS

The C post is available in a 36" (914mm) height.


MATERIALS AND FINISHES

The C post is a 3" OD tube made from 11-gauge steel with a 5.5" diameter anchoring flange at the base. The top of the tube is capped with a 3" diameter welded steel post cap with all welds ground smooth. A base cover is included with each post. The C post is available in bright chrome.

OPTIONS

REO ANCHORING PACKAGE

The REO anchoring package makes the standard anchoring style removable. The REO kit attaches to the base of the post with four bolts. The stem inserts into a socket that has been drilled and set into the floor (shown right).

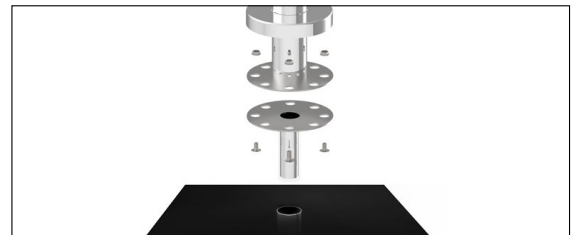

OTHER AVAILABLE MODELS

Alvarado offers other protection posts (shown below) and protection bollards (see - <http://www.alvaradomfg.com/asset-protection-products>)

Vogue Post



Space Saver



C Post



LS Post



Post Height	35", 44", 48" (889, 1118, 1219 mm)	35" (889 mm)	36" (914 mm)	35" (889 mm)
Post Diameter	2.5" (70 mm)	2.5" (70 mm)	3" (76 mm)	2" (51 mm)
Base Diameter	5.5" (140 mm)	3.5" (89 mm)	5.5" (140 mm)	5.5" (140 mm)
Removable/ Fixed Installed	Fixed (Removable Option)	Fixed	Fixed (Removable Option)	Removable



SHIPPING AND SITE PREPARATION

SHIPPING


The C post ships one per box.

SITE PREPARATION

The C post installs on level concrete. A skilled installer should perform the installation, in consultation with the owner or end user, following safe practices and the installation guidelines that come with the product.

TECHNICAL DIMENSIONS

Dimensions are shown in inches (mm). All measurements are approximate.

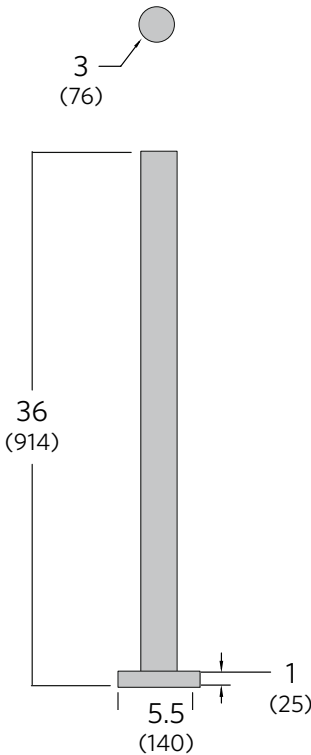

Height and Weight*	
Product Weight	7 lbs. (178 kg)
Shipping Weight	8 lbs. (203 kg)

*Shipping weight accounts for 1 C post per box.

WARRANTY

For a period of one year from the date of shipping, Alvarado will replace or repair, at Alvarado's option, any products or parts which are defective in materials or workmanship, provided recommended installation and maintenance procedures are followed. This warranty is void if damage is due to improper installation, maintenance or use. This warranty is limited to parts only, and does not cover labor or shipping charges incurred in connection with the removal or replacement of warranted products or parts.

This warranty is expressly made in lieu of any and all other warranties, expressed or implied, including, but not limited to implied warranties of merchantability and fitness for a particular purpose. Alvarado shall not be liable for any loss or damage, directly or indirectly, arising from the use of purchased products. In no event shall Alvarado be liable to buyer for consequential damages, special damages, incidental damages, loss of use, business interruption, loss of profits, or damages of any kind arising out of the use or inability to use a purchased product. In NO event shall Alvarado be liable for damages which exceed the purchase price of a covered product.

