

SL GATE

Product Name

Sleeve Latch Gate – Model SL-10, Model SL-15

Manufacturer

Alvarado Manufacturing Co., Inc.

12660 Colony St.

Chino, CA 91710


Telephone (909) 591-8431

Toll Free (800) 423-4143

Fax (909) 628-1403

www.alvaradomfg.com

Email: information@alvaradomfg.com

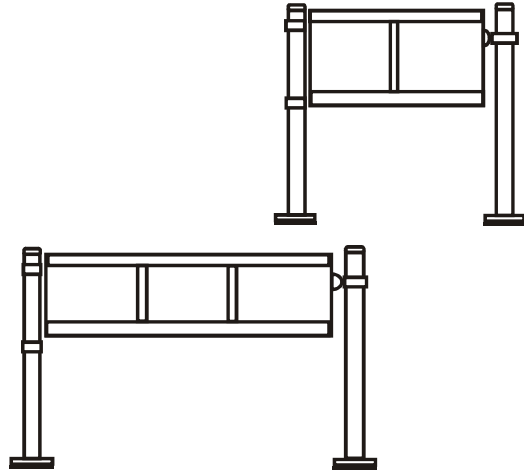

Product Description: A double sleeve hinge assembly and flip latch enables the SL-10 or SL-15 to swing in either direction and be mounted on any new or existing 2 1/4" OD post.

Materials: All materials meet the appropriate ASTM Standards.

Mechanical Components:

- The **Gate Arm** is made from two (2) 1 3/4" OD x 16 gauge steel tubes welded to a 1/4" x 2" steel plate at each end. A 3/4" OD notched and welded center rod reinforces the arm. Two (2) 2 3/4" OD steel rings are welded on one end of the gate arm to allow the gate to slide onto an existing hinge post. Each hinge ring is lined with plastic rings to reduce metal on metal contact. A 2 3/8" ID steel flip latch is bolted to the other end of the gate arm (Installation of latch is required).
- Two steel **Set Rings** are provided to secure the Gate Arm to the existing hinge post. Each Set Ring is secured to the post with two set screws. The Set Rings are slightly smaller in diameter than the hinges on the Gate Arm, so that they do not scrape against the Gate Arm as it moves.
- Two **Fiber Washers** are provided to separate the Gate Arm hinges from the Set Rings. They allow the Gate Arm to rotate by preventing metal on metal contact.

Finishes: The SL Gate is available in the following finishes:

- **High Polished Chrome** – All external fabricated materials are composed of chrome plated steel with a mirror polish.

Size: The SL-10 Gate has an overall height of 10" and is available in 36" and 48" widths.

The SL-15 Gate has an overall height of 15" with a 30" width. The overall height of the gate from the floor is determined during installation.

Shipping: SL Gates are shipped in a single package that includes both the Gate Arm and hardware to mount the gate to an existing post. Alvarado ships products throughout the world.

Installation: All SL Gates must be attached to an existing or newly installed post. Installation should be performed by a skilled installer following the manufacturer's instructions (Included).

Warranty: Alvarado Manufacturing Co., Inc. warrants the SL Gate from defects in material or workmanship, for the period of ONE YEAR from the date of shipment. Complete details of the warranty are available from Alvarado by request.